A11RW2A1 | Released by HIWIN design group.

列印者:00016430 王怡婷 列印時間:2015/12/08 09:13:49 輸出來源:A000006007 alice919
機密級 More Confidential

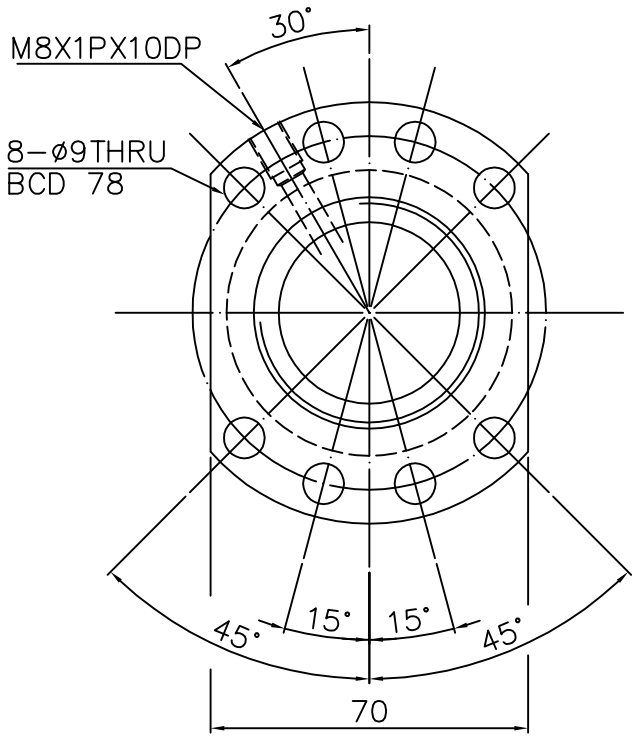

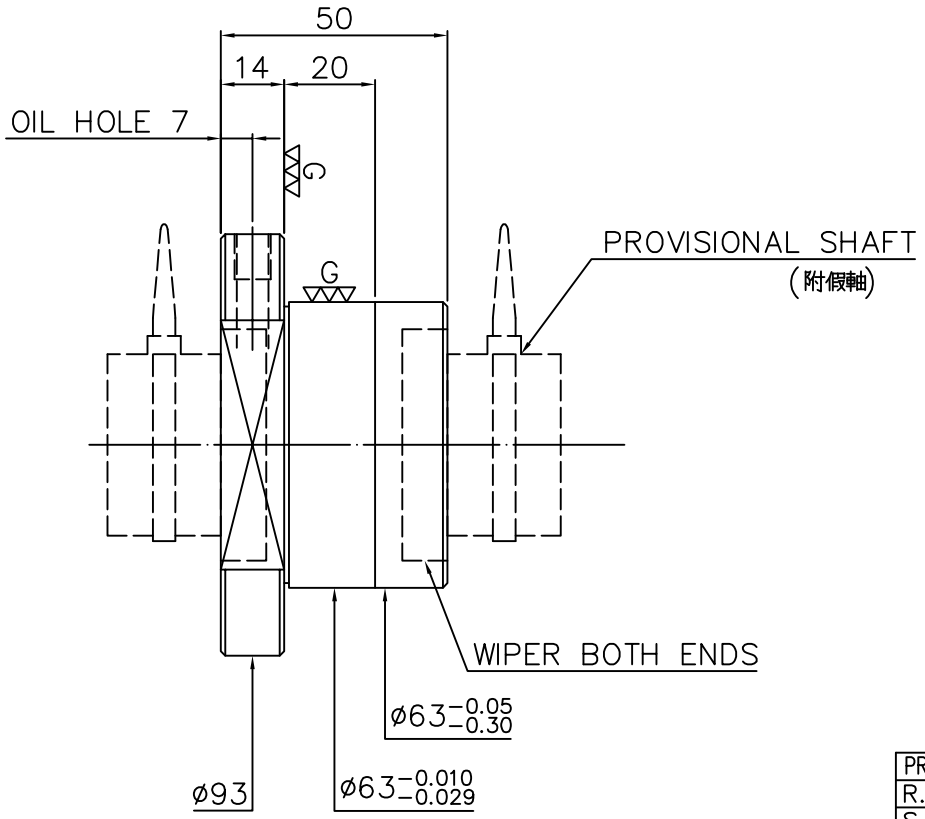

SPEC: R40-5K6-FSC

MAX. AXIAL LOAD (kgf)		LUBRICATION		PRELOAD (kgf)	~
MAX. ROTATIONAL SPEED (rpm)		SPACE BALL		R.D.	~
DN VALUE		E1 TYPE ASSEMBLY METHOD		S.F. (kgf)	
MAX. FEED RATE (m/min)		CUSTOMER DRAWING NO.		DRAG TORQUE (kgf-cm)	
ACCELERATION (m/sec²)		CUSTOMER MC TYPE		DIRECTION OF TURN	R
SUPPORT METHOD		CUSTOMER AXIAL TYPE		P.C. DIA.	40.03
				BALL DIA.	3.175
				BACKLASH	0.04MAX
				CIRCUIT	6
				LEAD ANGLE	2.28
				DYNAMIC (kgf)	2590
				STATIC (kgf)	10060
				LEAD	5

THREAD LENGTH

UNCHAMFERED USE ☐C0.5 ■C1 ☐C

ROUGH M/C	FIN M/C	GRD	SCALE
25a	6.3a	0.4a	1:X

NORMAL TOLERANCE mm

UP TO 6	6 TO 30	30 TO 120	120 TO 300	300 TO 600	600 TO 1200	1200 TO 2400	OVER 2400
±0.1	±0.2	±0.3	±0.4	±0.5	±0.8	±1.0	±1.5

MAT.	SH: ROLLED	DATE	2010.06.02
	NT: SNCM220/Equivalent	DWG	Rita
THREAD BALL TRACK HRC 56 ~ 62		APPD	Lady
		PROCESS NO.	G
CUSTR	HIWIN		
DWG.NO.	A11RW2A1		

*BREAK SHARP EDGE UNLESS OTHER SPECIFIED.
*未畫倒角者去毛邊 (C0.2MAX)

THREAD END ALLOWS ABOVE LENGTH OUT OF HARDNESS TOLERANCE

V300p: ~
ep: ~

HIWIN® BALLSCREWS

DATE	MODIFICATION	APPROVED

* PLEASE IGNORE CHINESE CHARACTERS WHICH ARE FOR OUR REFERENCE ONLY.

機密級 More Confidential