



5 ports Industrial Ethernet Switch

TELE2200 Series

❖ Overview

The TELE2205G is a 5-port industrial switch that supports up to 5*10/100/1000M RJ45 ports;


It has high anti-interference ability, the product supports 4KV surge protection, and 6KV contact / 8KV air ESD protection.

It supports Din-rail installation, reliable and durable, and can be used in security network video monitoring, network engineering and other occasions.

❖ Pictures



❖ PCBA

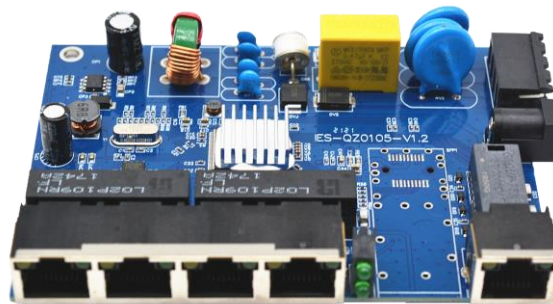

❖ Features

- Cache up to 4Mb, no pressure to transmit video, no packet loss, no freeze
- Support 16K bytes jumbo frame transmission, compatible with various extended protocols
- 16K MAC address table
- Support IEEE802.3az energy-efficient Ethernet technology
- Support IPv6 protocol
- Network port 4KV anti-surge protection

Telefly Telecommunications Equipment Co., Ltd

Email:telefly-tyler@telefly.cn Tel: (+86 755) 8607 0094 Fax: (+86 755) 8607 0000 Web:<https://www.telefly.cn/>

ADD: 96 Building, the second industrial area, Gongming, Baoan District, Shenzhen, Guangdong Province, P.R.China

❖ Specifications

Parameter	Specifications
Power connector	4-pin PH2.0mm terminal or DC plug (5.5-2.5mm)
Range of voltage	DC12~56V
Consumption	Self-consumption <5W
Ethernet ports	Ports: 5*10/100/1000Base-T ports
Cable and distance	Use cat5e/6,100m max
Standard	IEEE 802.3 IEEE802.3u IEEE802.3z IEEE802.3ab IEEE802.3x IEEE802.3az IEEE802.3Qad IEEE802.3ah IEEE802.1X IEEE802.1Q IEEE1588
Bandwidth	5.6 Gbps
Though put	4.16 Mbps
Buffer	4M
MAC address table	16K
Indicator	Power: 1 *red ; Ethernet ports 5: Green LEDs and yellow LEDs indicate Link/Act
Protection	Surge: 4KV, standard: IEC61000-4-5 ESD: 6KV: contact / 8KV: air, standard:IEC61000-4-2
operating temperature	-40℃~75℃
Storage temperature	-40℃~85℃
Humidity	0~95%(No condensation)
Dimension(L×W×H)	117*85*33mm
Material	Aluminium
Colour	Black
Net-weight	0.34KG

❖ Order information

Model	Description
TELE2205G	With 5*10/100/1000M RJ45 ports; 2*DC 12-56V power supply; Operating temperature:-40~75℃.